
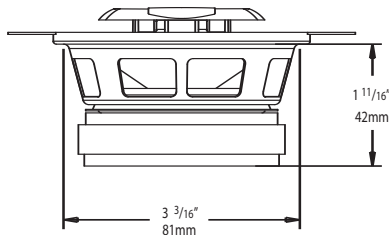


Boston

S35 Speakers Include:

- 4 x Hex Head Screw
- 4 x Spring Clip
- 1 x Hex Key
- 2 x Terminated Speaker Wire
- 4 x 16/18 AWG. Connector Barrel
- 2 x Woofer Gasket

S35 3 1/2-inch (87mm) Coaxial Speakers

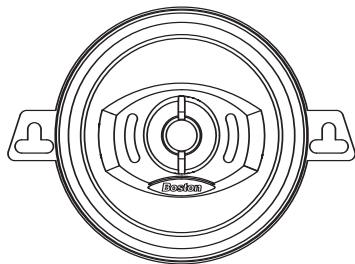


Specifications:

	S35
Nominal Size	3 1/2" (87mm)
RMS Power Handling	30w
Peak Power Handling	60w
Frequency Response ($\pm 3\text{dB}$)	100-20kHz
Impedance	4 Ω
Sensitivity (1w/1M)	92dB

Boston Acoustics, Inc. 300 Jubilee Drive Peabody, Massachusetts 01960 U.S.A. bostonacoustics.com

© 2005 Boston Acoustics, Inc. All rights reserved. Boston, Boston Acoustics, and the Boston Acoustics logo are registered trademarks of Boston Acoustics, Inc.


042-002317-1



Boston

S35 3 1/2-inch (87mm) Coaxial Speakers

Installation

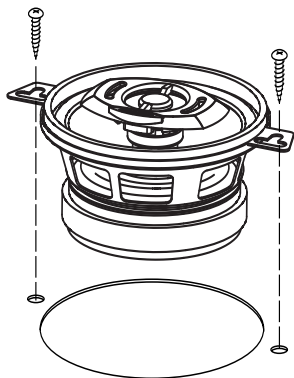

Wiring

